






## Hup 32-27

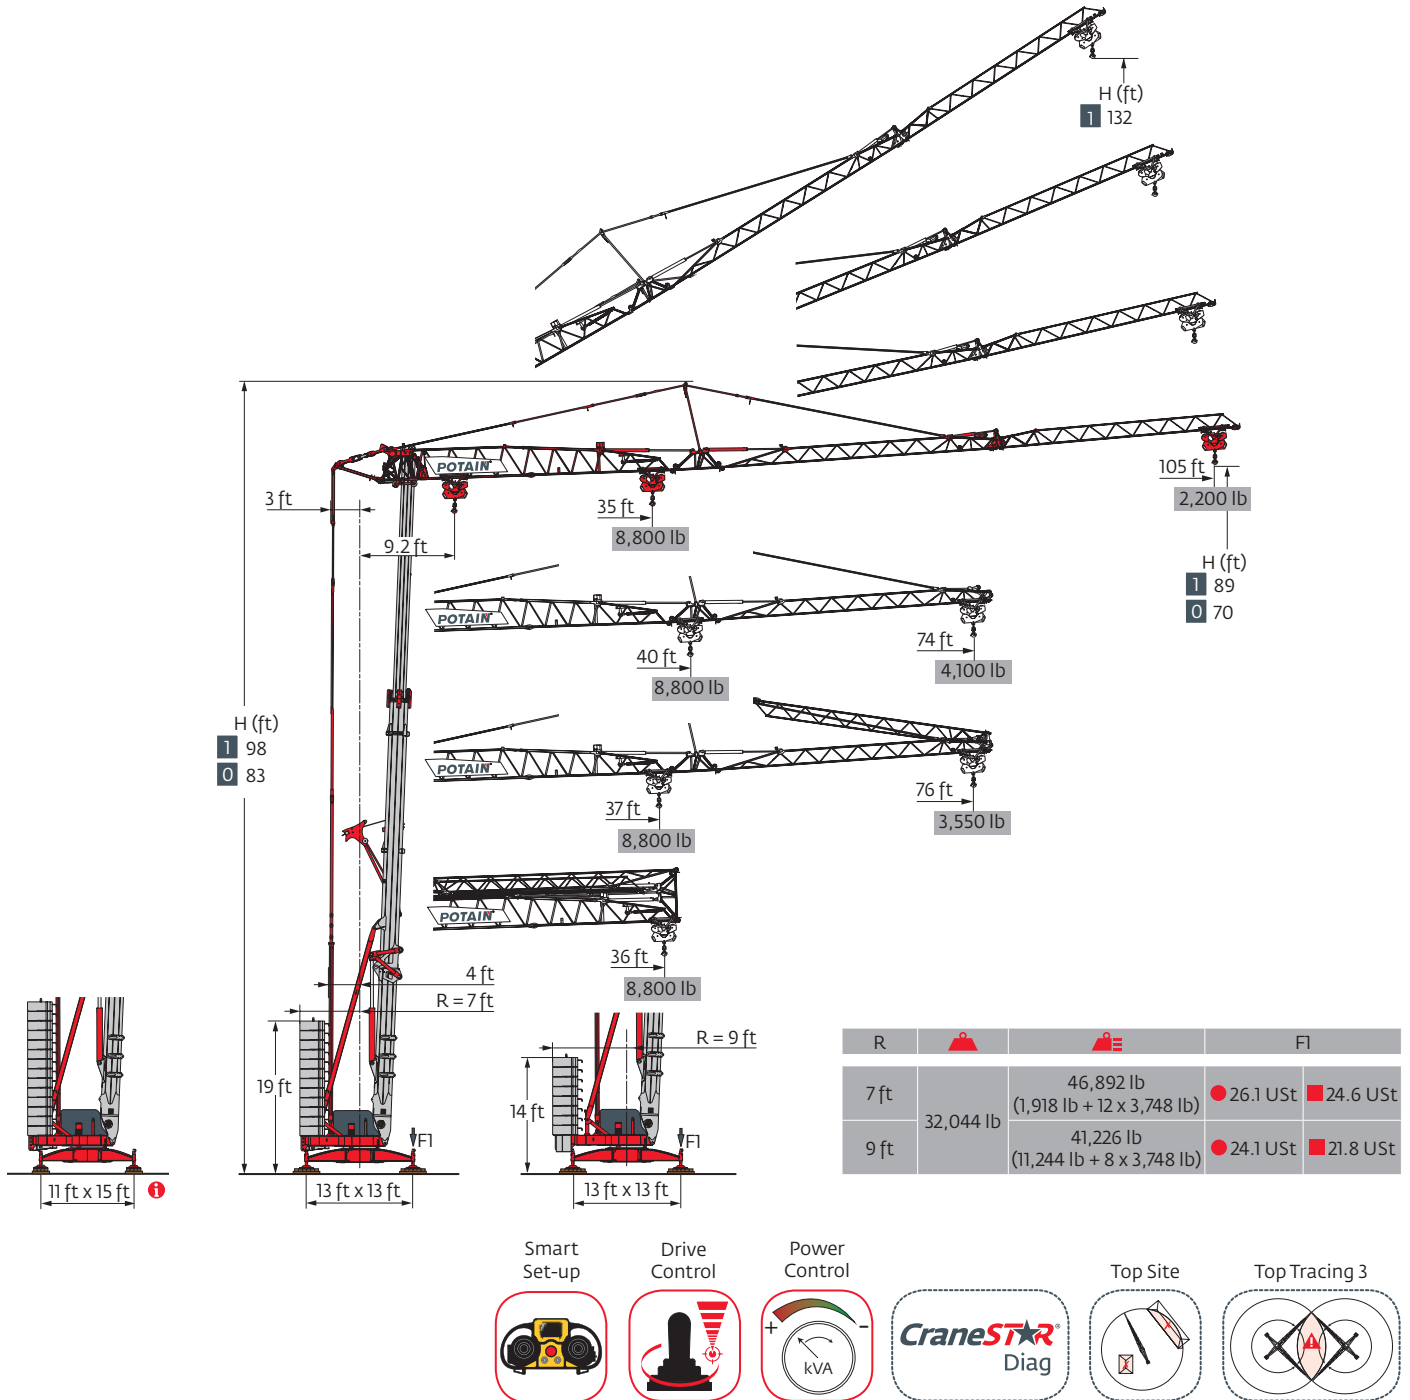


Load curves

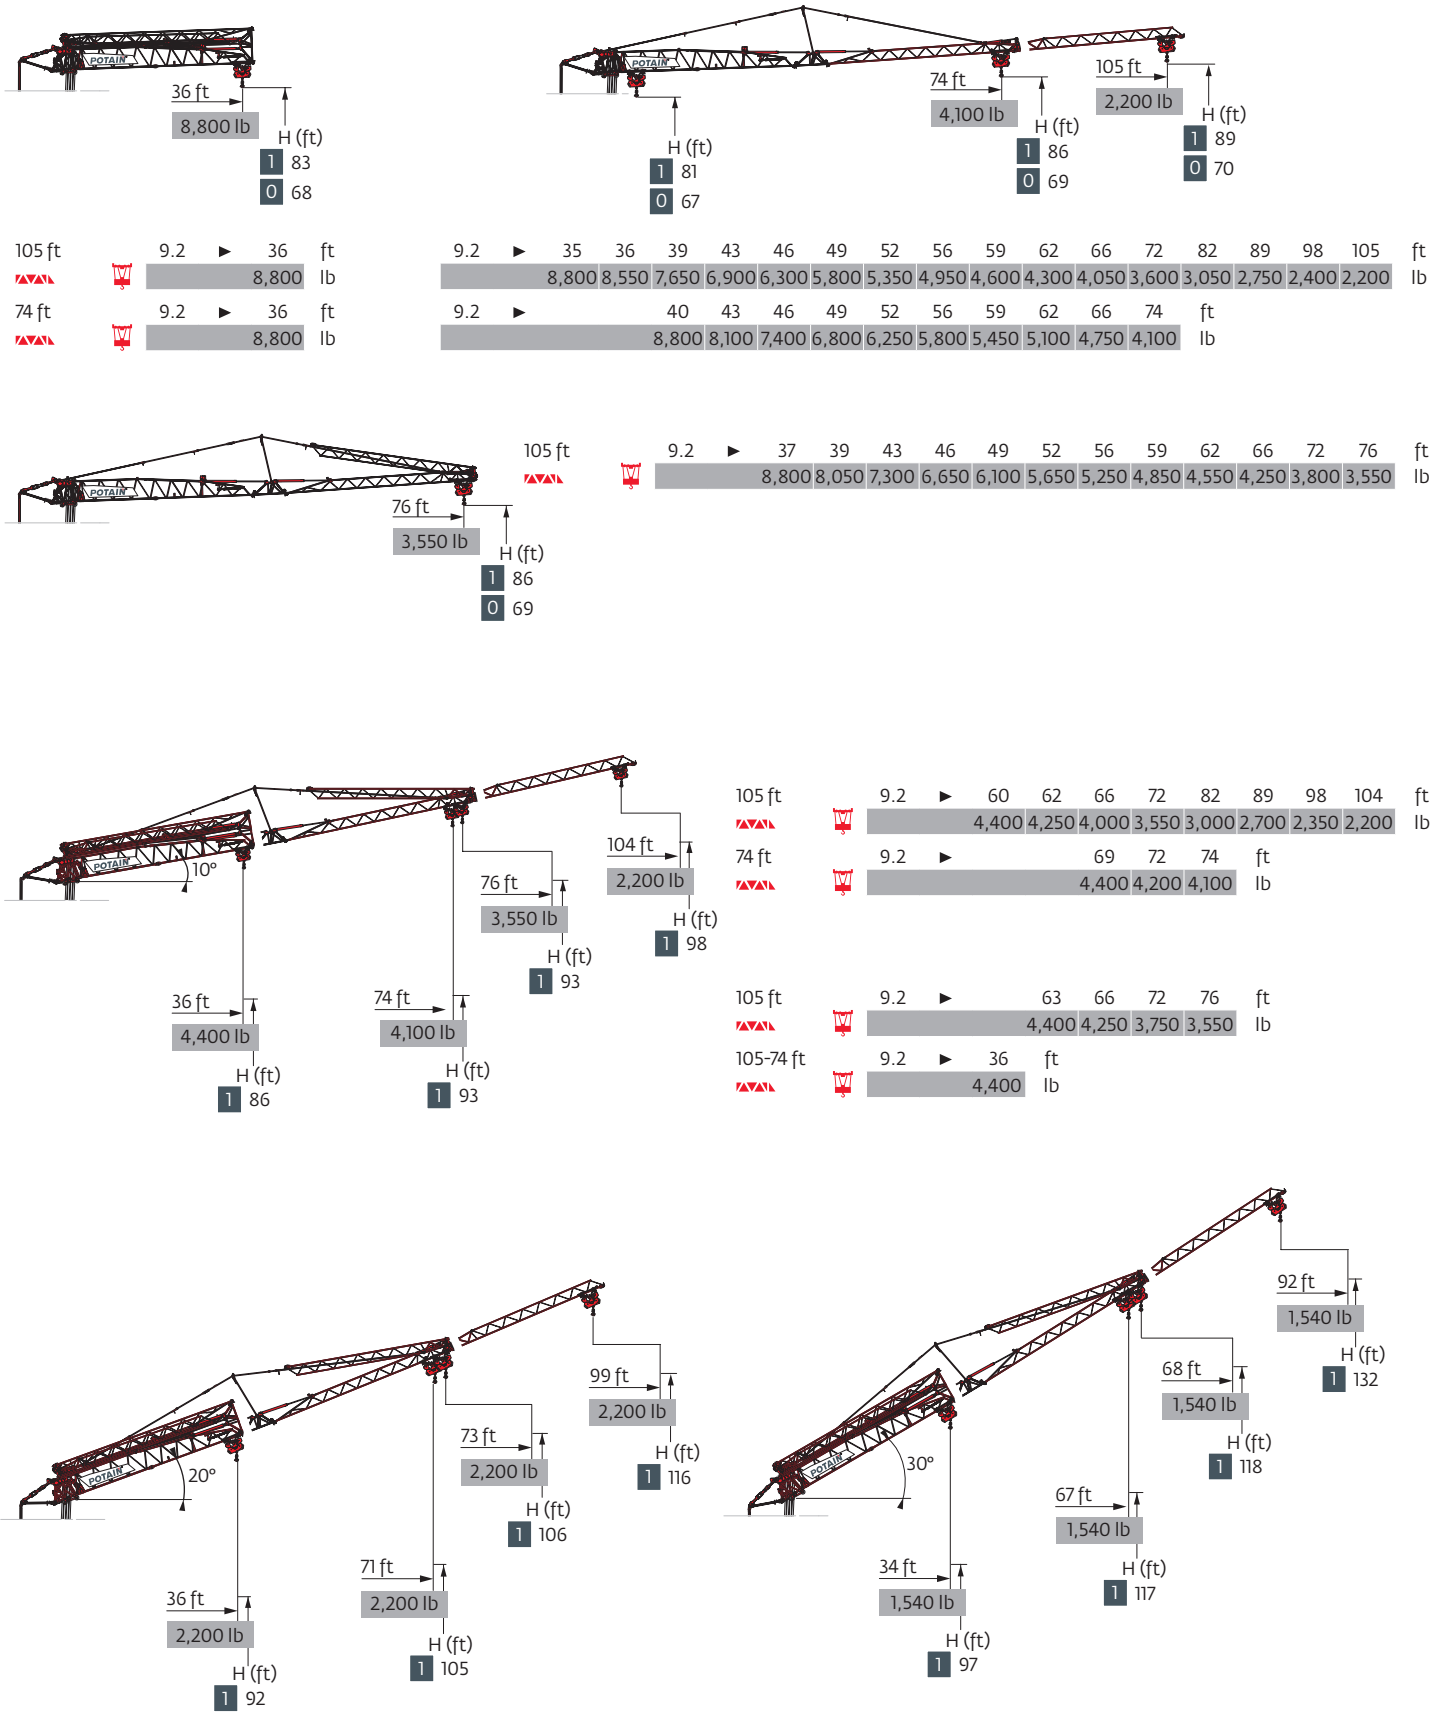


Mechanisms

480 V - 60 Hz			UU					hp	kW
	18 HPL™ 10	fpm	6	62	118	190	213	18	13
		lb	8,800	8,800	4,400	2,200	1,100		
	3 DVF 5	fpm	3 → 148 (0 → 2,200 lb) 3 → 135 (2,200 lb → 8,800 lb)					3	2.2
	HPS 141	rpm	0 → 0.9					5	3.7


IEC 60204-32	kVA	
480 V (+6% -10%) 60 Hz	19 → 13 kVA	

Erection

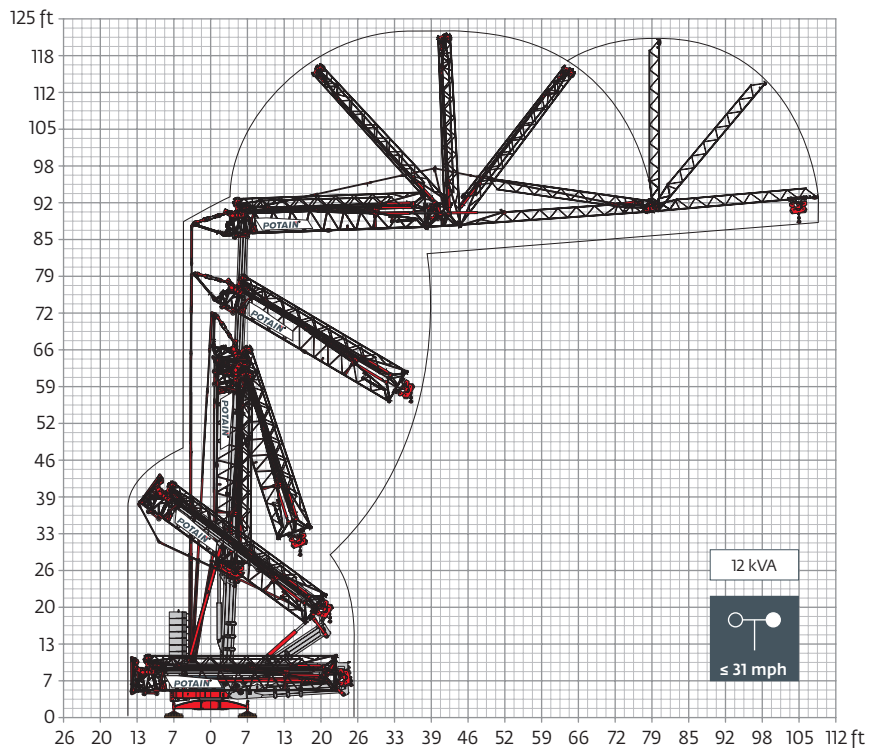


Transport


DS62/S120 - 6 mph

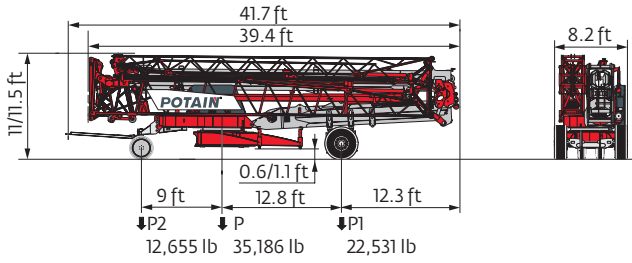


DJ105/S125 - 15.5 mph

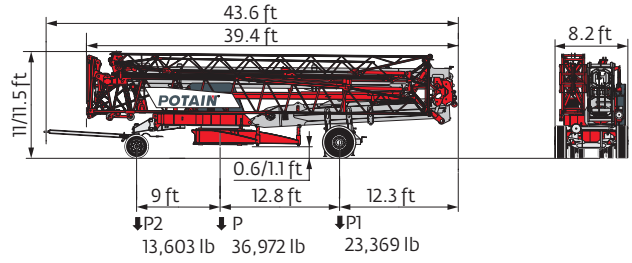

DJ126M/S125 - 15.5 mph

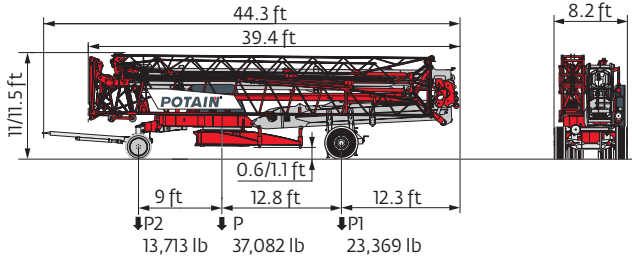

North America Highway Axle

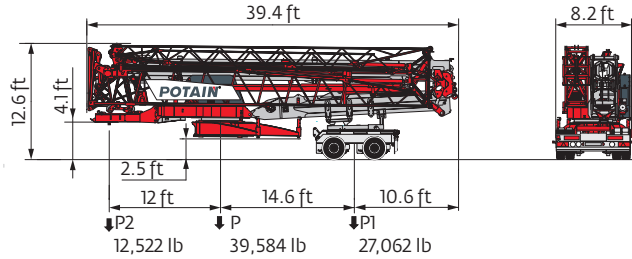

Container High Cube 40'



- R Rear slewing radius
- ⓘ Consult us
- Reactions in service
- Reactions out of service
- ⚠ Weight without load, without ballast, without transport axles, with max. jib and standard height
- ⚖ Total ballast weight
- Standard equipment
- ⊞ Options
- Hoisting
- Trolleying
- Slewing
- kVA Required power

⊞ Power Control Function: winch speeds adapted to the available power

⚠ This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.

**BRONSON CRANE**

**801-963-7850**  
 P.O. Box 2048  
 West Jordan, UT 84084  
**bronsoncrane.com**



© 2018 The Manitowoc Company, Inc.  
 www.manitowoc.com